




V120 FULLY RUGGED LAPTOP

- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- 12.2" FHD LumiBond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Versatile I/Os connectivity including two Thunderbolt™ 4 and docking solutions
- LifeSupport battery swappable technology
- Optional 1D/2D imager barcode reader and high-capacity batteries
- Wi-Fi 7 delivers superior data transfer speeds

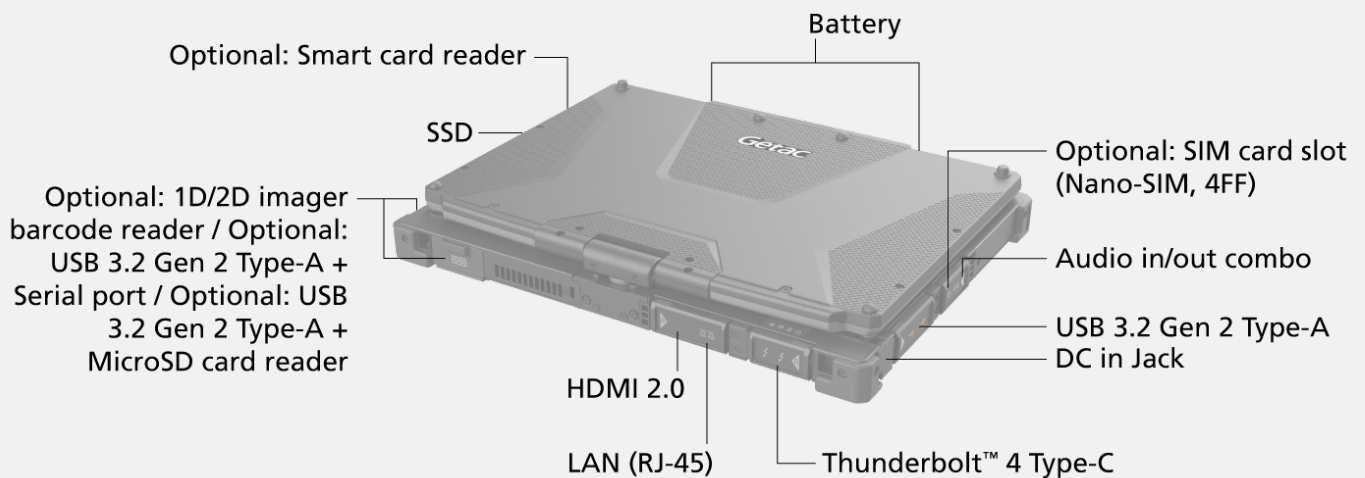

SPECIFICATIONS

Generation

G1

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ Ultra 5 processor 225H

Max. 4.9GHz with Intel® Turbo Boost Technology

- 18MB Intel® Smart Cache

Platform options:

Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise

Max. 5.0GHz with Intel® Turbo Boost Technology

- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H

Max. 5.1GHz with Intel® Turbo Boost Technology

- 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise

Max. 5.3GHz with Intel® Turbo Boost Technology

- 24MB Intel® Smart Cache

Graphics

Intel® Arc™ 130T GPU (For Intel® Core™ Ultra 5 processor) ⁱ

Intel® Arc™ 140T GPU (For Intel® Core™ Ultra 7 processor) ⁱ

NPU

Intel® AI Boost

Display

12.2" Wide Viewing Angle TFT LCD FHD WUXGA (1920 x 1200)

Protection film

1,000 nits LumiBond display with Getac sunlight readable technology

Capacitive multi-touch screen

Storage & Memory

16GB DDR5

Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD

Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

LED backlit membrane keyboard

Power button

4 programmable buttons

Pointing Device

Touchscreen

- Capacitive multi-touch screen

- Optional: Dual mode touchscreen (multi-touch and digitizer)

Touchpad

- Glide touchpad with left-click and right-click buttons

Audio

Integrated stereo speakers

Integrated dual-array microphone

Expansion Slot

Optional: Smart card reader

Optional: 1D/2D imager barcode reader ⁱⁱ

Optional: USB 3.2 Gen 2 Type-A + Serial port (9-pin; D-sub) ⁱⁱ

Optional: USB 3.2 Gen 2 Type-A + MicroSD ⁱⁱ

I/O Interface

5MP webcam x 1 ⁱⁱⁱ

Audio in/out combo x 1

DC in Jack x 1

USB 3.2 Gen 2 Type-A x 2

Thunderbolt™ 4 Type-C x 2

LAN (RJ45) x 1

HDMI 2.0 x 1

Docking connector x 1

Optional: SIM card slot x 1 (Nano-SIM, 4FF) ^{iv,v}

Optional: Windows Hello face-authentication SMP camera (front-facing) x 1 ⁱⁱ

Optional: Tri RF antenna pass-through for 4G (GPS, WLAN, WWAN)

Optional: Quad RF antenna pass-through for 5G (GPS, WLAN, WWAN, WWAN MIMO)

Optional: 13MP auto focus rear camera x 1

Communication Interface

10/100/1000 base-T Ethernet

Intel® Wi-Fi 7 BE200, 802.11be

Bluetooth (v5.4) ^{vi}

Optional: Dedicated GPS with L1/L5 ^{vii}

Optional: 4G LTE mobile broadband with integrated GPS ^{iv}

Optional: 5G Sub-6 with integrated GPS ^{iv,viii}

Optional: Dual SIM (Nano-SIM 4FF and e-SIM) ^{iv,v}

Security Feature

TPM 2.0

Kensington lock

Getac Secure Erase

Optional: Smart card reader

Optional: Intel® vPro® Technology

Optional: Fingerprint reader

Optional: HF RFID reader ^{ix}

Optional: Windows Hello face-authentication SMP camera (front-facing) ⁱⁱⁱ

Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC, 50/60Hz)

Li-ion battery (7.74V, typical 4070mAh; min. 3800mAh) x 2

LifeSupport battery swappable technology

Optional: High-capacity Li-ion battery (11.61V, typical 4070mAh; min.

3800mAh) x 2

Dimension (W x D x H) & Weight

302 x 224 x 35.7mm (11.89" x 8.82" x 1.41")

2.1kg (4.63lbs) [†]

Rugged Feature

MIL-STD-810H certified

IP66 certified

MIL-STD-461G certified ^{xii}

Vibration & 4ft (1.2m) drop resistant ^{xii}

Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) ^{xiii}

Optional: Salt fog certified

Environmental Specification

Temperature ^{xiv}:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Pre-installed Software

Getac Utility

Getac Camera

Getac Geolocation

Getac Barcode Manager ^{xv}

Optional: Absolute Secure Endpoint

Optional software

Getac Driving Safety Utility

Getac Monitoring

Getac VGPS Utility ^{xvi}

Absolute Secure Access

Accessories

Battery (7.74V, typical 4070mAh; min. 3800mAh)

AC adapter (65W, 100-240VAC)

Optional:

Carry bag

Battery (7.74V, typical 4070mAh; min. 3800mAh)

High-capacity Li-ion battery (11.61V, typical 4070mAh; min. 3800mAh)

Multi-Bay charger (Dual-Bay)

Multi-Bay charger (Eight-Bay)

AC adapter (65W, 100-240VAC)

MIL-STD-461 AC adapter (90W, 100-240VAC)

DC-DC vehicle adapter (120W, 11-32VDC)

Digitizer pen

Capacitive stylus with tether

Protection film

Handle

Hard handle

Hand strap

Shoulder strap (2-point)

Vehicle cradle ^{xvii}

Vehicle dock ^{xviii}

Spare SSD kit

65W Type-C adapter

100W Type-C adapter

Getac rugged keyboard

Getac DS100 USB-C docking station with AC adapter

V120 FULLY RUGGED LAPTOP

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee.

That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. Optional USB 3.2 Gen 2 Type-A + Serial port (9-pin; D-sub), optional USB 3.2 Gen 2 Type-A + Micro SD card reader, and optional 1D/2D imager barcode reader are mutually exclusive.
- III. 5MP webcam and optional Windows Hello face-authentication SMP camera (front-facing) are mutually exclusive options.
- IV. Units with 4G/5G LTE option come with an embedded SIM card slot.
- V. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- VIII. Only available in the US, UK, EU, Australia and New Zealand.
- IX. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- X. Weight and dimensions vary from configurations and optional accessories.
- XI. MIL-STD-461 90W AC adapter sold separately.
- XII. Drop test results vary from configurations and optional accessories.
- XIII. Available with limited configurations and environment conditions.
- XIV. Tested by an independent third-party test lab following MIL-STD-810H.
- XV. Available when the barcode reader option is selected.
- XVI. Models require either embedded or standalone GPS module.
- XVII. Gamber-Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

Getac

Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,
Shropshire TF3 3BJ, United Kingdom
Tel : +44 (0) 1952 207 222

Sales-Getac-UK@getac.com |
www.getac.com/en/

Copyright © 2026 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference only,available specification shall be subjected to quotation by request.

Vehicle Dock	
Serial Port	2
External VGA	1
Microphone	1
Audio Output	1
DC in Jack	1
USB	4
LAN	1
HDMI	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)